




### Foam Pig type PU-HD-LR

The long-run foam pig is completely covered with lowwear polyurethane elastomer. It is used both for pipeline cleaning and for hydrostatic testing and provides optimal seal. The high density long-run foam pig will traverse diameter reductions upto 10%.

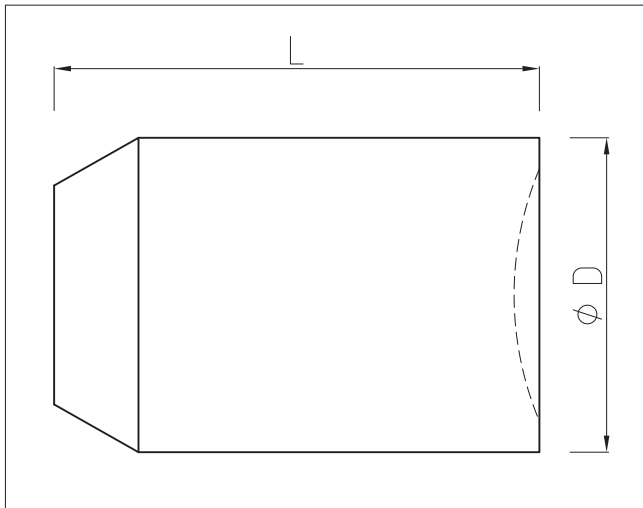

Standard dimensions in mm, Standard deviation +/- 2%.  
Spacial dimentions and executions available upon request.  
Density: 110 kg/m<sup>3</sup> (9 lbs/cft)  
Maximum diameter reduction: 10%

Size	D x L	Weight (kg)
2"	60x155	0.14
2.1/2"	72x155	0.19
3"	85x155	0.24
4"	110x195	0.40
5"	135x220	0.54
6"	165x266	1.00
7"	177x280	1.16
8"	215x330	1.90
10"	267x415	3.50
12"	317x480	5.90
14"	346x530	7.30
16"	410x595	12.00
18"	463x760	14.80
20"	513x760	20.50
22"	563x810	26.00
24"	613x880	33.00
26"	673x990	44.00
28"	718x945	49.00
30"	768x1130	67.00
32"	818x1170	78.00
34"	863x1340	98.00
36"	918x1370	112.00
38"	968x1370	123.00
40"	1018x1470	148.00
42"	1068x1580	173.00
44"	1128x1640	200.00
46"	1168x1720	224.00
48"	1228x1760	253.00
56"	1430x2100	404.00
60"	1530x2230	564.00
64"	1630x2600	645.00
76"	1950x2820	1100.00
80"	2040x3000	1550.00