


Foam Pig type PU-MD-LR

The long run foam pig is completely covered with low wear polyurethane elastomer coating. It is used both for pipeline cleaning as well as for hydrostatic testing. The medium density long run foam pig will traverse diameter reductions up to 10%.

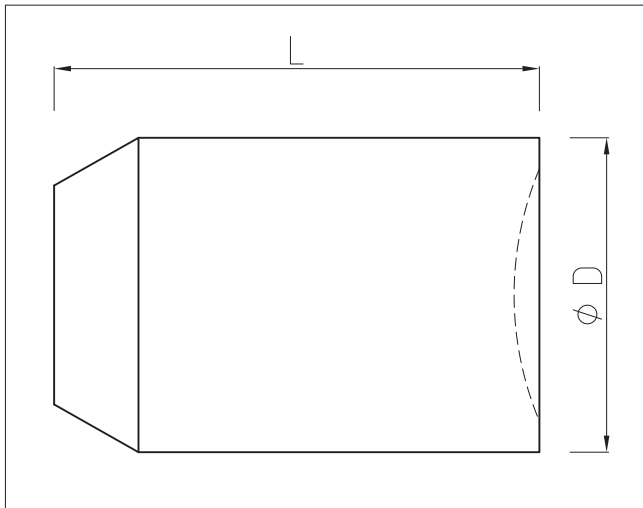

Standard dimensions in mm, Standard deviation +/- 2%.
Special dimensions and executions available upon request.
Density: 80 kg/m³ (6 lbs/cft)
Maximum diameter reduction: 10%

Size	D x L	Weight (kg)
2"	60x155	0.13
2.1/2"	72x155	0.17
3"	85x155	0.22
4"	110x195	0.34
5"	135x220	0.46
6"	165x266	0.80
7"	177x280	0.96
8"	215x330	1.50
10"	267x415	2.80
12"	317x480	4.70
14"	346x530	5.80
16"	410x595	9.60
18"	463x760	11.60
20"	513x760	16.00
22"	563x810	20.00
24"	613x880	26.00
26"	673x990	34.00
28"	718x945	38.00
30"	768x1130	52.00
32"	818x1170	60.00
34"	863x1340	74.00
36"	918x1370	85.00
38"	968x1370	94.00
40"	1018x1470	113.00
42"	1068x1580	131.00
44"	1128x1640	151.00
46"	1168x1720	170.00
48"	1228x1760	191.00
56"	1430x2100	304.00
60"	1530x2230	424.00
64"	1630x2600	485.00
76"	1950x2820	710.00
80"	2040x3000	1060.00