




Foam Pig type PU-MD-PL

The medium density bare foam pig is mostly used for regular on-stream wiping, as well as dewatering of pipelines. The medium density foam pig shows excellent flexibility and is provided with a strong polyurethane back-seal in blue color. The medium density foam pig will traverse diameter reductions upto 20%. From 18" top also covered with polyurethane elastomer blue colour.

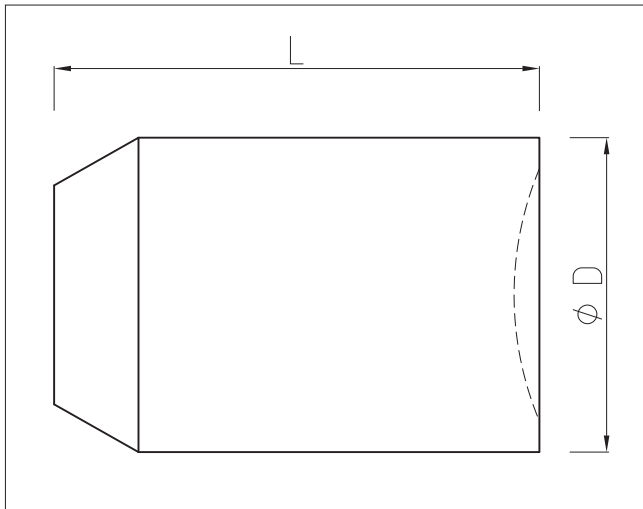

Standard dimensions in mm, Standard deviation +/- 2%.
Special dimensions and executions available upon request.
Density: 80 kg/m³ (6 lbs/cft)
Maximum diameter reduction: 20%

Size	D x L	Weight (kg)
2"	60x160	0.04
2.1/2"	75x155	0.06
3"	85x155	0.08
4"	110x195	0.16
5"	139x220	0.23
6"	168x266	0.50
7"	177x280	0.59
8"	215x330	1.00
10"	260x415	2.00
12"	321x510	3.50
14"	346x530	4.30
16"	410x595	6.70
18"	455x660	9.20
20"	505x760	13.00
22"	555x810	16.70
24"	605x880	21.50
26"	665x990	29.30
28"	710x945	32.00
30"	760x1130	44.00
32"	810x1170	52.00
34"	855x1340	66.00
36"	910x1370	76.00
38"	960x1370	85.00
40"	1010x1470	100.00
42"	1060x1580	120.00
44"	1120x1640	138.00
46"	1160x1720	155.00
48"	1220x1760	175.00
56"	1420x2100	285.00
60"	1520x2230	400.00
64"	1620x2600	460.00
76"	1940x2820	650.00
80"	2030x3000	970.00